



FUNG YUAN

Sincere / Innovation / Profession
Responsibility / Enthusiasm

PVC & OPP
膠帶集合包裝機

FASP-6020-2



包裝範例 Samples

PVC & OPP Tapes Accounting Grouping Sealing and Shrink Packaging Machine



鋒源機械有限公司
FUNG YUAN MACHINERY CO., LTD.



Sincere / Innovation / Profession
Responsibility / Enthusiasm

PVC & OPP 膠帶集合包裝機

FASP-6020-2

PVC & OPP Accounting Grouping Sealing and Shrink Packaging Machine

FASP-6020-2 PVC & OPP 膠帶集合包裝機
PVC & OPP Tapes Accounting Grouping Sealing and Shrink Packaging Machine

特點:

- 精心研發全自動入料到包裝完成，一氣呵成節省人力。
- 隨產品變化，機械點調整容易。
- 包裝產品商標朝外，美觀劃一。
- 包裝產品數量多樣化，6卷、8卷、10卷、12卷，雙卷數均適用。
- 包裝材料為無毒環保PE收縮膠膜。
- 包裝材料：PE、PVC、OPP，均適合使用。
- 適用PVC電氣膠帶及扁圓形產品。
- OPP膠帶範圍內也可適用。


Features :

- Carefully design starts from fully auto feeding to pack for labor-saving.
- Following the change of product, the mechanical point can be adjusted easily.
- Trademark for packing is designed outwardly, and beautifully.
- Packing quantitative design is versatile, and available for 6 rolls, 8 rolls, 10 rolls, and 12 rolls / bundle.
- Packing materials is all non-toxic recycle materials and PE shrinkage film.
- Suitably used for PVC electric tapes and flat rounded product.
- OPP tape is available if dimension meets machine design.

FALC-6020-2 SPECIFICATION :

規格 SPECIFICATION		FALC-6020-2
包裝尺寸(公厘) Packing Size(mm)	直徑 Dia. 厚度 Thickness	Ø50 ~ Ø80 12~36 m / m
包裝型態 Packing Matrix		6卷、8卷、10卷、12卷 (Rolls)
包裝能量(包/分) Packing Capacity (packs/min.)		5-10 packs / min
電源 Power		220V / 380V x 0.6KW
空氣壓力 Air Pressure		5 ~ 6 kg / cm ²
機械尺寸(長x寬x高) Machine dimension (LxWxH)		2460 x 1270 x 1595
重量 Weight		350 kgs

機械尺寸圖 MACHINE SIZE :

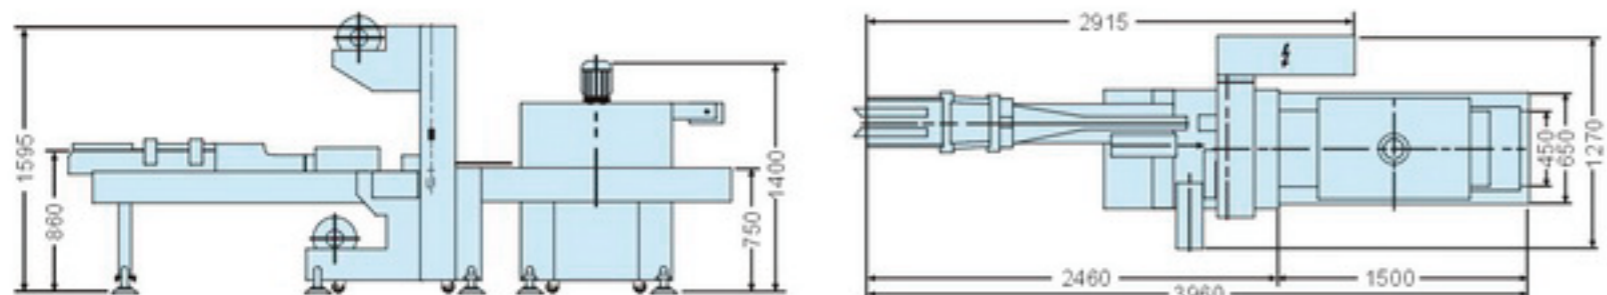

FM-4525 收縮機
PE Shrink Tunnel

特點:

- 不傷品質、節省電力、增加利潤。
- 熱縮爐輻射均勻，熱風循環可加導流板，出風力均勻，產品收縮後平整美觀，輸送以滾筒帶動。
- 經久耐用，溫度自動控制，速度快慢由DC馬達控制。
- 備註：特殊規格可另設計製造，本公司擁有修改權。


Features :

- Never hurting to the quality, power saving, and increasing profit.
- Heat shrinkage radiation is in equilibrium, and hot air circulation can added with current guide board for appropriate air output. After shrinking, the product becomes uniform and beautiful. Transmission unit is driven by the roller.
- Durable for use, and the temperature is controlled automatically. Speed is controlled by DC motor.
- Remark : Special specification is available to be custom-made on request. Our company reserves the right for modification.

FM-4525 規格表 FM-4525 SPECIFICATION :

包裝尺寸 Packing Size (W.xH.) mm	包裝能力(公尺/每分) Packing Ability (Meter/Min)	電源 Power	電熱 Electric Heating	機械尺寸(長x寬x高) Dimension L x W x H (mm)
12卷(Rolls)	1-10M	220V 380V	9KW	1500 x 650 x 1400

包裝流程圖 PACKING FLOW DIAGRAM :

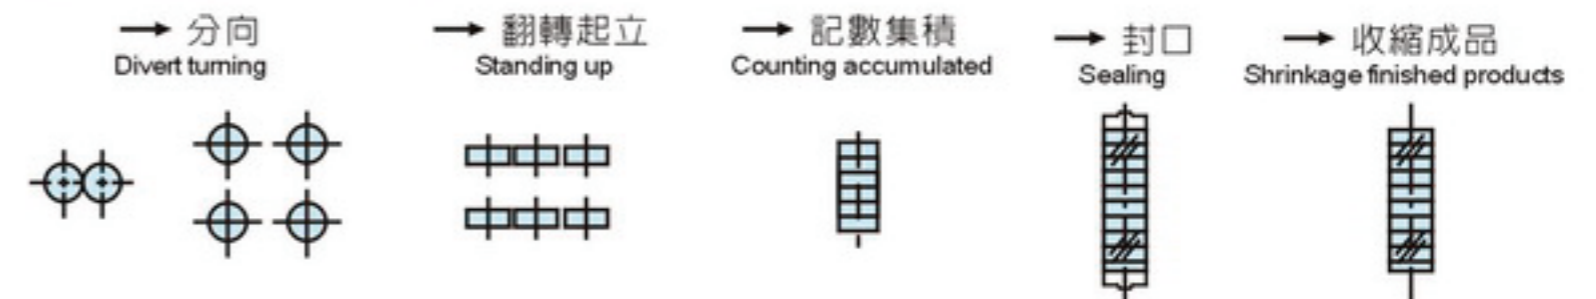

鋒源機械有限公司

FUNG YUAN MACHINERY CO., LTD.

公司：台中縣豐原市圓環北路二段321號

工廠：台中縣豐原市東北街187號

Office : No.321, Sec.2, Yuan Hwan North Rd., Feng Yuan City, 420 Taichung, Taiwan

Factory : No.187, Tung Pei St., Feng Yuan City, Taichung, Taiwan

TEL : 886-4-25232986, 25227318, 25253217-8 FAX : 886-4-25276828

Http://www.fungyuan.com E-mail : fungyuan@ms25.hinet.net