



FUNG YUAN

Sincere / Innovation / Profession  
Responsibility / Enthusiasm

PVC & OPP  
膠帶集合包裝機

FASP-9020-2A



包裝範例 Samples

PVC & OPP Tapes Accounting-Grouping-Shrink Wrapper



鋒源機械有限公司  
FUNG YUAN MACHINERY CO., LTD.



Sincere / Innovation / Profession  
Responsibility / Enthusiasm

# PVC & OPP 膠帶集合包裝機

# FASP-9020-2A

PVC & OPP Tapes Accounting-Grouping-Shrink Wrapper

FASP-9020-2A PVC & OPP 膠帶計數包裝機  
PVC & OPP Tapes Accounting-Grouping-Shrink Wrapper

### 特點:

- 全自動入料，可直接連線分條機。
- 機械易調整，適合不同尺寸大小的膠帶包裝。
- 包裝產品商標朝外，美觀劃一。
- 包裝樣式多樣化，適合6卷，8卷，10卷，12卷等雙數卷均適用。
- 包裝材料為無毒環保PE收縮膜膠膜。
- 適用PVC電氣膠帶，OPP膠帶或其他扁圓形物品，如罐頭等。
- 速度可搭配G&ARS240或其他高速型分條機。


### Features :

- Fully Automatic feeding to work in-line and save labor cost.
- Machine designs for easier adjustment, which suitable for a wider range of product
- The packing of Trademark is designed outwardly, and beautifully.
- Packing matrix is versatile, and available for 6, 8, 10, 12 rolls/bundle.
- Packing materials: PE/PVC/OPP shrinkable film
- Suitable used for PVC electric tapes, OPP tapes and flat-rounded product, such as canned food.
- High Output Speed to meet G&A RS240 or other high speed slitter-rewinder

### FASP-9020-2A SPECIFICATION :

規格 SPECIFICATION		FASP-9020-2A
包裝尺寸(公厘)	直徑 Dia.	PVC Tape-dia. $\phi$ 50 ~ $\phi$ 80 mm OPP Tape-dia. $\phi$ 90 ~ $\phi$ 130 mm
Packing Size(mm)	厚度 Thickness	PVC Tape-dia. : 12 ~ 25 mmT OPP Tape-dia. : 48 ~ 60 mmT
包裝型態 Packing Matrix		6卷、8卷、10卷、12卷/包 (pcs/bundle)
包裝能量(包/分) Packing Capacity (packs/min.)		18-22 bundles / min (It depends on packing matrix)
電源 Power		3PH / 220V / 380V x 1.5 kw
空氣壓力 Air Pressure		5 ~ 6 kg / cm <sup>2</sup> ; 400 L / min
機械尺寸(長x寬x高) Machine dimension (LxWxH)		4160 x 1380 x 1820
重量 Weight		700 kgs

### 機械尺寸圖 MACHINE SIZE :

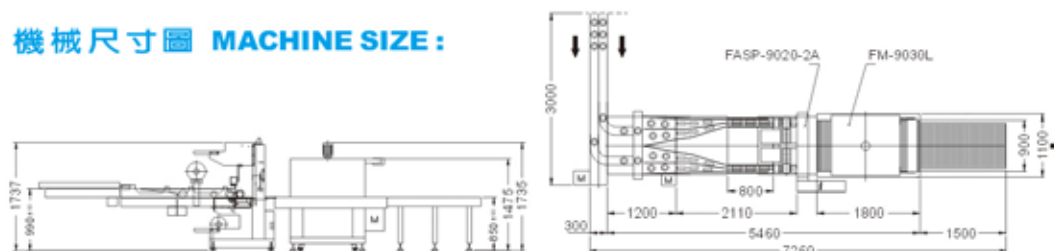

FM-9030L 收縮機  
PE Shrink Tunnel

### 特點:

- 不傷品質、節省電力、增加利潤。
- 熱縮爐輻射均勻，熱風循環可加導流板，出風力均勻，產品收縮後平整美觀，輸送以滾筒帶動。
- 經久耐用，溫度自動控制，速度快慢由DC馬達控制。
- 備註：特殊規格可另設計製造，本公司擁有修改權。


### Features :

- Never hurting to the quality, power saving, and increasing profit.
- Heat shrinkage radiation is in equilibrium, and hot air circulation can added with current guide board for appropriate air output. After shrinking, the product becomes uniform and beautiful. Transmission unit is driven by the roller.
- Durable for use, and the temperature is controlled automatically. Speed is controlled by DC motor.
- Remark : Special specification is available to be custom-made on request. Our company reserves the right for modification.

### FM-9030L 規格表 FM-9030L SPECIFICATION :

包裝尺寸 Packing Size (W.xH.) mm	包裝能力(公尺/每分) Packing Ability (Meter/Min)	電源 Power	電熱 Electric Heating	機械尺寸(長x寬x高) Dimension L x W x H (mm)
300mm (W) x 130mm (H)	1-10M adjustable	3PH / 220V 380V	19.5 KW	1800 x 1100 x 1800 450 kgs

### 包裝流程圖 PACKING FLOW DIAGRAM :

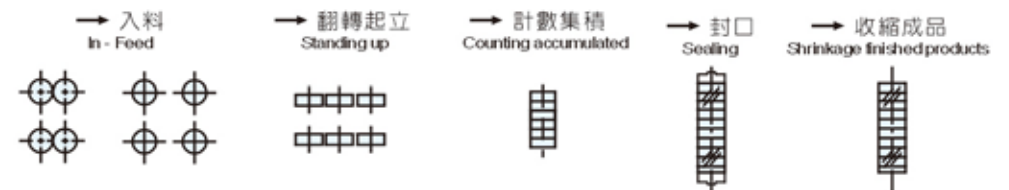

## 鋒源機械有限公司

FUNG YUAN MACHINERY CO., LTD.

公司：台中市豐原區圓環北路二段321號

工廠：台中市豐原區東北街187號

Office : No.321, Sec.2, Yuan Hwan North Rd., Feng Yuan Dist., 420 Taichung City, Taiwan

Factory : No.187, Tung Pei St., Feng Yuan Dist., Taichung City, Taiwan

TEL : 886-4-25232986, 25227318, 25253217-8 FAX : 886-4-25276828

Http : //www.fungyuan.com E-mail : fungyuan@ms25.hinet.net